

Standardized Slide Gates

DESIGNED AND
MANUFACTURED BY
TRUE GATE EXPERTS


- Premium quality heavy duty design
- In stock now, adapted to your application and delivered in a matter of days
- 5 year warranty
- Full perimeter bi-directional sealing
- Guaranteed maximum leakage rate 0.04 gpm/ft [0.5 l/min/m]
- Ultra stiff flange back frame
- ¼" (6mm) minimum plate thickness
- 316/316L grade Stainless Steel
- Self-adjusting UHMWPE seals



To get your specifications, drawings and prices, visit us at fontaine-aquanox.com


SERIES S Standardized Slide Gates

MULTIPLE ARRANGEMENTS AVAILABLE

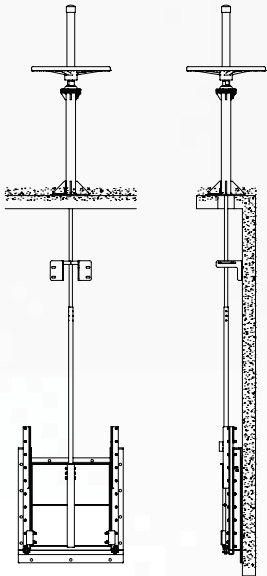


MODEL S11-P

Open Frame Gate with a rising stem design and pedestal mounted actuator.

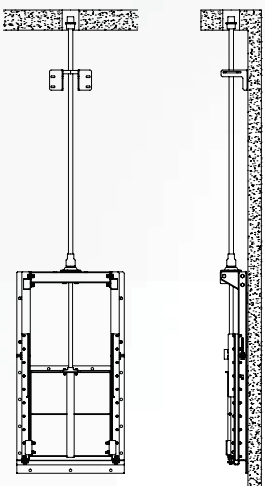


MODEL S22-F

Self-Contained Frame Gate with a non-rising stem design and an actuator in floor box.

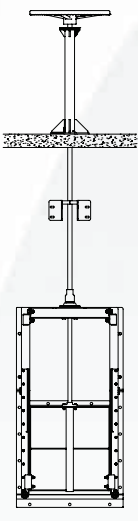

MODEL S22-P


Self-Contained Frame Gate with a non-rising stem design and pedestal mounted actuator.




MODEL S22-Y

Self-Contained Frame Gate with a non-rising stem design and actuator directly mounted on the top section of the frame (yoke).


ULTRA STIFF FLANGE BACK AND SELF ADJUSTING SEALING SYSTEM



TOP SEAL



SIDE SEAL



BOTTOM SEAL

AVAILABLE FROM 8" (200mm) TO 48" (1200mm) SIZE

A Gate Size		B		C		D		E		F	
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
8	200	16	406	24.00	610	28.00	711	6.72	171	7.72	196
10	250	18	457	28.25	718	32.25	819	6.72	171	7.72	196
12	300	20	508	32.50	826	36.50	927	6.72	171	7.72	196
16	400	24	610	39.25	997	43.25	1099	6.72	171	8.35	212
18	450	26	660	43.50	1105	47.50	1207	6.72	171	8.35	212
20	500	28	711	47.50	1207	51.50	1308	6.72	171	8.35	212
24	600	32	813	56.00	1422	60.00	1524	6.72	171	8.35	212
30	750	38	965	68.88	1750	72.88	1851	7.22	183	8.78	223
36	900	44	1118	81.38	2067	85.38	2169	7.47	190	8.78	223
42	1050	50	1270	94.38	2397	98.38	2499	7.85	199	8.78	223
48	1200	56	1422	107.13	2721	111.13	2823	7.85	199	8.78	223

